


COMMERCIAL SWITCH-MODE RADIAL LEADED CAPACITORS





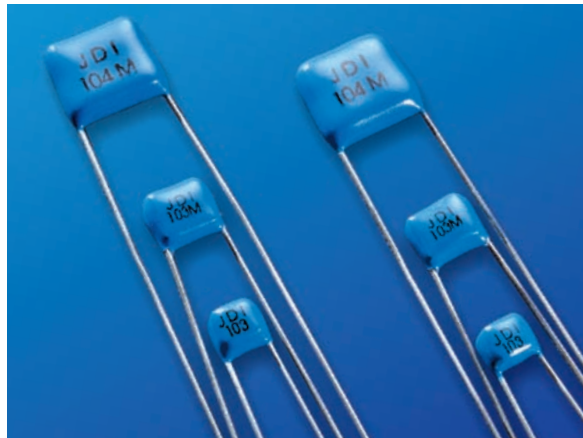

KEY FEATURES

- Rated Working Voltages from 25 to 500 VDC
- Rugged Epoxy Coating Offers Increased Protection
- Compact MLC Designs Smaller Than Film or Disc
- Hi-Rel Screened Versions Available
- Custom Sizes, Voltages, and Values Available

APPLICATIONS





- Power Supplies
- Voltage Multipliers
- Data Isolation
- Surge Protection
- Industrial Control Circuits
- Custom Applications


CAPACITANCE / VOLTAGE SELECTION

				RATED		NPO CAPACITANCE (MAX.)		X7R CAPACITANCE (MAX.)	
				VOLTAGE	VALUE	CODE	VALUE	CODE	
 H03	W	.300 max.	(7.62 max.)	25 VDC	.070 μ F	703	2.70 μ F	275	
	H	.300 max.	(7.62 max.)	50 VDC	.060 μ F	603	2.20 μ F	225	
	T	.200 max.	(5.08 max.)	100 VDC	.050 μ F	503	1.80 μ F	185	
	S	.200 nom.	(5.08 nom.)	200 VDC	.040 μ F	403	.800 μ F	804	
	Ld	.020 nom.	(.510 nom.)	500 VDC	.020 μ F	203	.300 μ F	304	
 H04	W	.400 max.	(10.2 max.)	25 VDC	.120 μ F	124	4.70 μ F	475	
	H	.400 max.	(10.2 max.)	50 VDC	.100 μ F	104	3.30 μ F	335	
	T	.200 max.	(5.08 max.)	100 VDC	.082 μ F	823	2.70 μ F	275	
	S	.200 nom.	(5.08 nom.)	200 VDC	.050 μ F	503	1.00 μ F	105	
	Ld	.020 nom.	(.510 nom.)	500 VDC	.030 μ F	303	.390 μ F	394	
 H05	W	.500 max.	(12.7 max.)	25 VDC	.240 μ F	244	8.20 μ F	825	
	H	.500 max.	(12.7 max.)	50 VDC	.200 μ F	204	7.50 μ F	755	
	T	.200 max.	(5.08 max.)	100 VDC	.180 μ F	184	6.20 μ F	625	
	S	.400 nom.	(10.2 nom.)	200 VDC	.110 μ F	114	2.70 μ F	275	
	Ld	.025 nom.	(.635 nom.)	500 VDC	.070 μ F	703	1.00 μ F	105	
 H06	W	.870 max.	(22.1 max.)	25 VDC	.750 μ F	754	28.0 μ F	286	
	H	.600 max.	(15.2 max.)	50 VDC	.620 μ F	624	24.0 μ F	246	
	T	.200 max.	(5.08 max.)	100 VDC	.560 μ F	564	18.0 μ F	186	
	S	.790 nom.	(20.1 nom.)	200 VDC	.360 μ F	364	8.20 μ F	825	
	Ld	.032 nom.	(.813 nom.)	500 VDC	.240 μ F	244	3.00 μ F	305	



CAPACITANCE / VOLTAGE SELECTION

				RATED		NPO CAPACITANCE (MAX.)		X7R CAPACITANCE (MAX.)	
				VOLTAGE	VALUE	CODE	VALUE	CODE	
 H07	W	1.10 max.	(27.9 max.)	25 VDC	.680 μ F	684	24.0 μ F	246	
	H	.600 max.	(15.2 max.)	50 VDC	.560 μ F	564	20.0 μ F	206	
	T	.200 max.	(5.08 max.)	100 VDC	.470 μ F	474	16.0 μ F	166	
	S	.980 nom.	(24.9 nom.)	200 VDC	.330 μ F	334	6.80 μ F	685	
	Ld	.032 nom.	(.813 nom.)	500 VDC	.200 μ F	204	2.40 μ F	245	
 H08	W	1.10 max.	(27.9 max.)	25 VDC	1.20 μ F	125	33.0 μ F	336	
	H	.600 max.	(15.2 max.)	50 VDC	1.10 μ F	115	22.0 μ F	226	
	T	.350 max.	(8.89 max.)	100 VDC	.820 μ F	824	16.0 μ F	166	
	S	.980 nom.	(24.9 nom.)	200 VDC	.470 μ F	474	10.0 μ F	106	
	Ld	.032 nom.	(.813 nom.)	500 VDC	.300 μ F	304	5.10 μ F	515	
 H09	W	.670 max.	(17 max.)	25 VDC	.450 μ F	454	17.0 μ F	176	
	H	.540 max.	(13.7 max.)	50 VDC	.360 μ F	364	14.0 μ F	146	
	T	.200 max.	(5.08 max.)	100 VDC	.330 μ F	334	11.0 μ F	116	
	S	.575 nom.	(14.6 nom.)	200 VDC	.240 μ F	244	6.00 μ F	605	
	Ld	.025 nom.	(.635 nom.)	500 VDC	.180 μ F	184	2.40 μ F	245	
 H10	W	.930 max.	(23.6 max.)	25 VDC	1.00 μ F	105	39.0 μ F	396	
	H	.720 max.	(18.3 max.)	50 VDC	.900 μ F	904	30.0 μ F	306	
	T	.250 max.	(6.35 max.)	100 VDC	.750 μ F	754	24.0 μ F	246	
	S	.800 nom.	(20.3 nom.)	200 VDC	.470 μ F	474	16.0 μ F	166	
	Ld	.032 nom.	(.813 nom.)	500 VDC	.300 μ F	304	8.00 μ F	805	



Dielectric specifications are listed on page 16

HOW TO ORDER



201	H07	W	105	K	Q	4	
VOLTAGE	CASE SIZE	DIELECTRIC	CAPACITANCE	TOLERANCE	TERMINATION	MARKING	SPECIAL MODIFIER
Standard Voltages: 250 = 25 V 500 = 50 V 101 = 100 V 201 = 200 V 501 = 500 V	See Chart	N = NPO W = X7R	1st two digits are significant; third digit denotes number of zeros. 102 = 1000 pF 103 = 0.01 μ F 105 = 1.00 μ F 106 = 10.0 μ F	J = \pm 5% K = \pm 10% M = \pm 20% Z = +80% -20%	Q = Leaded & Encapsulated	4 = Standard 3 = Specified	H = High Rel Testing per Customer
Part number written: 201H07W105KQ4							

COMMERCIAL SWITCH-MODE RADIAL LEADED CAPACITORS

DIELECTRIC CHARACTERISTICS

	NPO DIELECTRIC	X7R DIELECTRIC
TEMPERATURE COEFFICIENT:	0 ± 30 ppm / °C , -55 to 125°C	0 ± 15% , -55 to 125°C
DISSIPATION FACTOR:	.001 (0.1%) max, 1Khz, 25°C	.025 (2.5%) max, 1KHz, 25°C
AGEING:	None	2.5% / decade hour
INSULATION RESISTANCE:	1000 ΩF or 100 GΩ, whichever is less @ 25°C, WVDC (1KVDC max)	1000 ΩF or 100 GΩ, whichever is less @ 25°C, WVDC (1KVDC max)
DIELECTRIC STRENGTH:		
FOR 1,000 - 5,000 V RATINGS:	1.2 X WVDC, 25°C, 50 mA max	1.2 X WVDC, 25°C, 50 mA max
FOR 500 V RATINGS:	750 VDC, 25°C, 50 mA max	750 VDC, 25°C, 50 mA max
FOR 200 -250 V RATINGS:	2.0 X WVDC, 25°C, 50 mA max	2.0 X WVDC, 25°C, 50 mA max
FOR 50 -100 V RATINGS:	2.5 X WVDC, 25°C, 50 mA max	2.5 X WVDC, 25°C, 50 mA max
TEST PARAMETERS:	1Khz ± 50Hz, 1.0±0.2 VRMS, 25°C	1Khz ± 50Hz, 1.0±0.2 VRMS, 25°C

TYPICAL CAPACITANCE CHANGE VS TEMPERATURE:

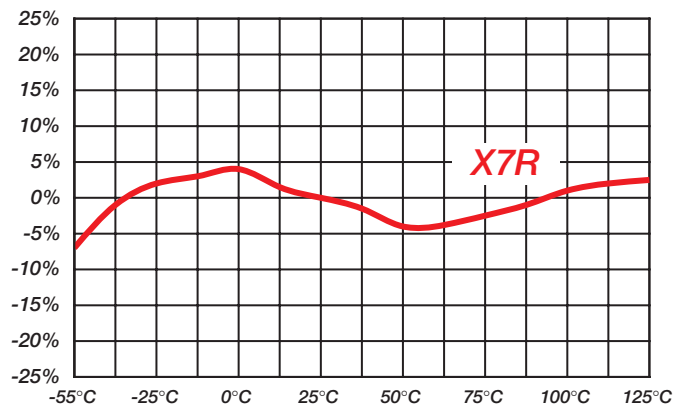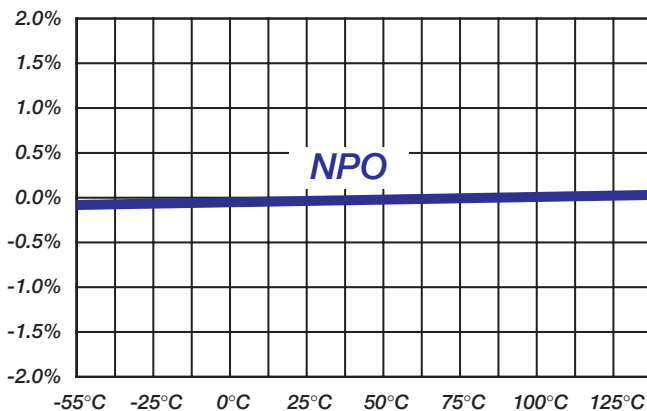

Advanced Monolythic Ceramics, Inc. reserves the right to make design and price changes without notice. All sales are subject to Advanced Monolythic Ceramics, Inc. terms and conditions printed on the back side of our sales order acknowledgment forms including a limited warranty and remedies for non-conforming goods or defective goods. We will be pleased to provide a copy of these terms and conditions for your review.